


330 NFPA Full Body Harness 330A Padded NFPA Full Body Harness

Designed for fire department, rescue, military, industrial and commercial applications where a rear fall arrest D attachment point is not required. Seat portion is easily donned and adjusted by use of camlock buckles. Chest portion includes front D ring for high point of attachment for belay line. Two models available, basic and padded. Weight 330 3 lb. 11 oz. 330A 4 lb. 7 oz.

- 330 one size, fully adjustable
- 330A sizes S, M, L, XL
- Large D ring for multiple connections
- Slot webbing construction
- Chest and seat separate to create a Class II seat harness
- Waist pads on 330A can be removed
- 3 inch leg pads on 330A can be removed
- Optional pads can be added to 330 after purchase
- One gear rack, 4 on padded version
- Certified to NFPA 1983/2006 ed. standards
- Available in black or orange

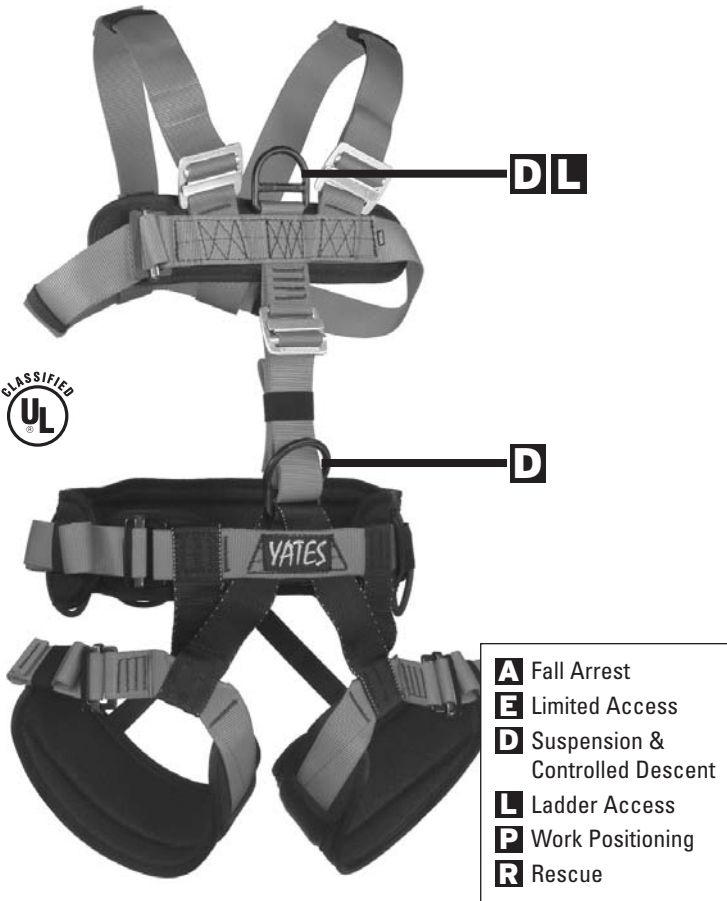

- A** Fall Arrest
- E** Limited Access
- D** Suspension & Controlled Descent
- L** Ladder Access
- P** Work Positioning
- R** Rescue

3

Bottom

1

2

4

Sizing For Labels

CLASSIFIED UL 93F4

EMERGENCY SERVICES LIFE SAFETY HARNESS IN ACCORDANCE WITH NFPA 1983-2006 ED. MANUFACTURED BY YATES GEAR, INC. MADE IN USA. MATERIAL: NYLON

THIS LIFE SAFETY HARNESS MEETS THE HARNESS REQUIREMENTS OF NFPA 1983, STANDARD ON LIFE SAFETY ROPE AND EQUIPMENT FOR EMERGENCY SERVICES 2006 EDITION, CLASS _____

TYPE OF HARNESS _____
 LOT & DATE OF MFG: _____
 CLASS II HARNESS, FITS WAIST SIZE _____
 CLASS III ONE PIECE HARNESS, FITS WAIST SIZE _____ FITS HEIGHT _____

WARNING! DO NOT REMOVE THIS LABEL

- You could be killed or seriously injured if you do not read and understand this label before using harness.
- Special training and knowledge are required to use this harness.
- The user is responsible for understanding the intended use of this harness.
- You must thoroughly read and understand all manufacturer's instructions before use.
- Use and inspect harness only in accordance with the manufacturer's instructions.
- Refer to additional manufacturer's instructions furnished with this harness before use. You can contact the manufacturer at: Yates Gear Inc., 2608 Hartnell Avenue #6, Hedding, CA 96002. Phone: 1-800-928-3716 for important safety information. Do not remove this label!

Double-stack webbing through buckle as shown leaving a minimum of 3 inches of tail.

WARNING!

Yates PROFESSIONAL

SIZE/GRADEUR:
 S M L XL

GROUP:
 A D E L P

CLASS III FULL BODY HARNESS
 CAPACITY 310 LBS. NYLON WEB
 MADE IN U.S.A.

INSPECTION LOG

2005				
2006				
2007				
2008				
2009				
2010				

USER IDENTIFICATION
 MARK WITH PERMANENT MARKER

DO NOT REMOVE THIS LABEL REV. 6/2005

Class A
Fall Arrest

Class D Suspension
& Controlled Descent

Class E
Limited Access

Class L
Ladder Access

Class P
Work Positioning

- 330: W 26"-54" H 5'5"-6'4"
 330AS: W 26"-34" H 5'0"-5'9"
 330AM: W 30"-36" H 5'5"-6'4"
 330AL: W 34"-40" H 5'5"-6'4"
 330AXL: W 38"-48" H 5'5"-7'0"